



SERIE TR TOURING




- Ultra light cabinet
- High wind resistance
- Grayscale 14-16 bit
- Transparency >70%.
- Anti-collision technology
- Refresh rate >3840 Hz.
- Magnet incorporated in the cabinet for easy assembly
- Designed for single-person installation
- Anti-humidity and anti-UV technology
- TN mask design for higher contrast

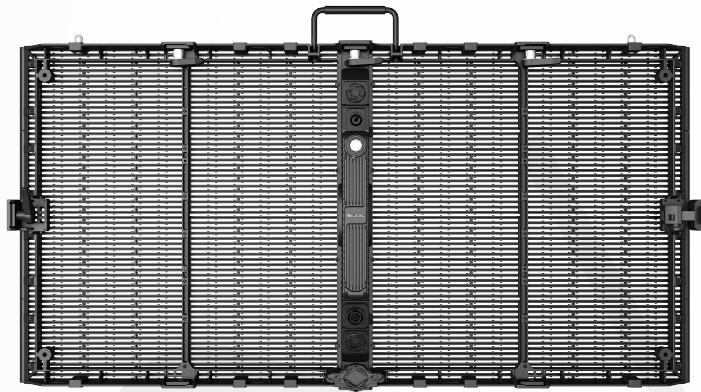


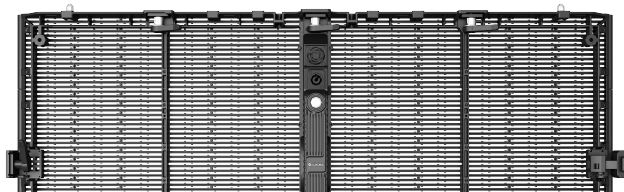

- Easy 90° installation
- Curved lock +/- 15
- Separate power supply box
- High brightness >5,000 nits

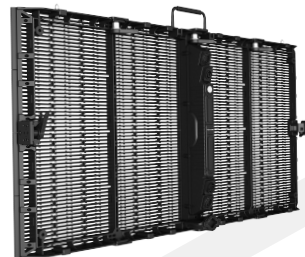

MODEL	TR 3
Pixel Pitch	H: 3.91 mm V: 7.81 mm
Cabinet Resolution	256 x 64 px
Cabinet Size (mm)	1000 x 500 X 88.5 mm
Pixel Density (pixels/m ²)	32,768 px
Weight (Kg/m ²)	13 Kg.
Viewing Angle	H:160° V:140°
Brightness (Nits/m ²)	3500-5000 Nits
LED'S	SMD1921
Degree of Protection	OUTDOOR: IP65
Update Frequency	>3840Hz
Allowable operating temperature	-20°C + 45°C 10 - 90% Humidity
Maximum consumption (Max/Avg) W/m ²	360 / 120 W
Operating Voltage	110-220V AC/ 50-60 Hz
LED's lifetime	+100,000 hours

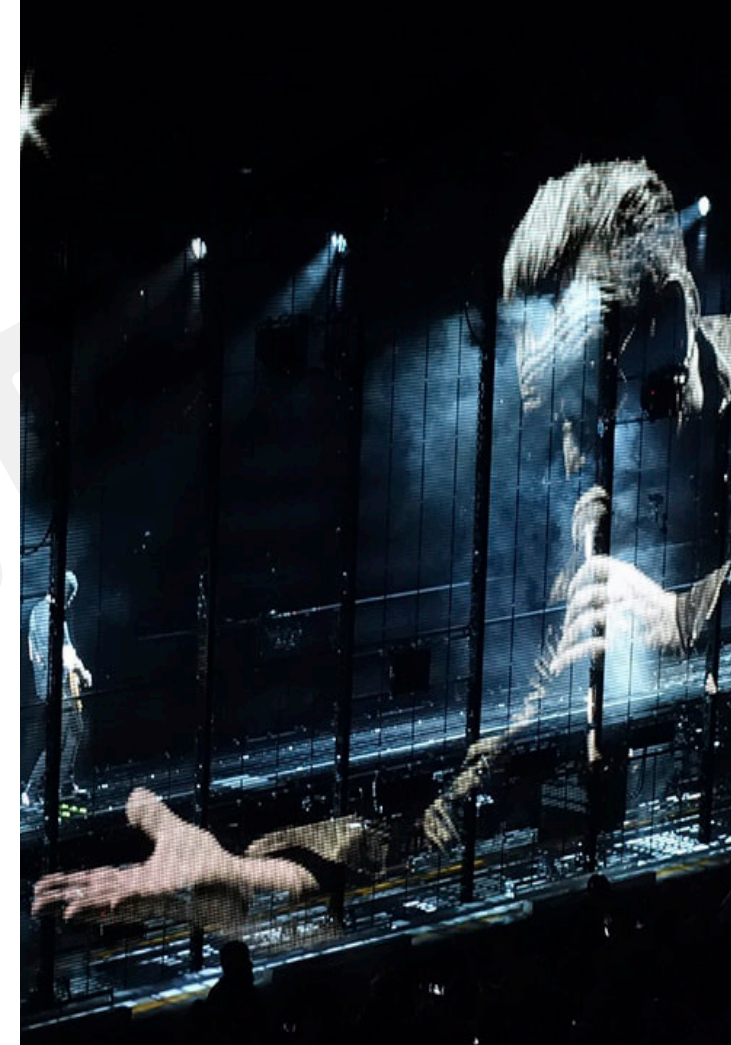

LEDEC.MX

55 9453 2280
contacto@ledecgroup.com

MEXICO / USA / CHINA

•CDMX •Merida •Cancun •Tijuana •Monterrey